

G3

Insert with AutoFire™

SECONDARY
HEAT EXCHANGER
SAVES MONEY.



Radiant
Gas Fireplaces

LEGEND G3

First introduced in 1991, we continually adapt and improve on all aspects of the G3, our flagship line, to exceed the expectations of Valor customers—the industry's number one selling radiant gas insert. Ideal for replacing old wood fireplaces, the G3 features:

EFFICIENT RADIANT HEAT PERFORMANCE

Increase your home's overall energy efficiency—and comfort level. The Valor fireplace family showcases over a century of advancements in radiant heat technology and distinct hearth designs for your home.

AutoFire™ Takes initial startup easier by automatically adjusting air flow within the fireplace:

Provides improved operating efficiencies—saving you energy.

Fine tunes your fireplace for peak performance in ways fixed restrictors cannot—an industry first.

VALOR REMOTE CONTROL

With your thermostat at your fingertips, the remote is convenient, reliable and easy to use, helping you program direct warmth. Wireless connection simplifies installation.

ZONE HEATING

Bring the comfort of radiant and convective warmth to the spaces you frequent most in your home—no ducting or forced air required.

SUPERIOR CONSTRUCTION

- Double-sided aluminized steel firebox and trims prevent rusting and wear.
- High-grade, powder coated paint maintains the appearance and ensures long-lasting enjoyment.
- Aerodynamic firebox shape quietly and efficiently moves constant, steady heat into the room—without a fan.

Design choices

Choose from endless design combinations with 10 stunning fireplace fronts and 17 surrounds in both traditional and contemporary appeal.



CONVECTIVE HEAT

G3's built-in Secondary Heat Exchanger naturally improves convective heat—removing the need for a fan. Your fire will heat up fast for immediate comfort—and no electrical hookup saves you money.



Contemporary front with Driftwood, Black Fluted liner, and Black Picture frame.

FRONTS +

With ten fronts and 17 surrounds, your choices are plentiful when it comes to the G3's design. While some, like the Clearview and the Contemporary fronts, are quite modern, our Contour and Deluxe surrounds suggest a classic style.



Clearview Front	745CFV
Clearview Cast fret	758CCB
Vintage Iron Square Trim	757STV




Copper Contemporary Front	765CSC
Black Square Trim	756STB



Clearview Front	745CFV
Clearview Fret	758CCB
Brushed Nickel Square Trim	756STP



Clearview Front	745CFV
Ventana Fret	1225VFB
2" Black Square Trim	767STB

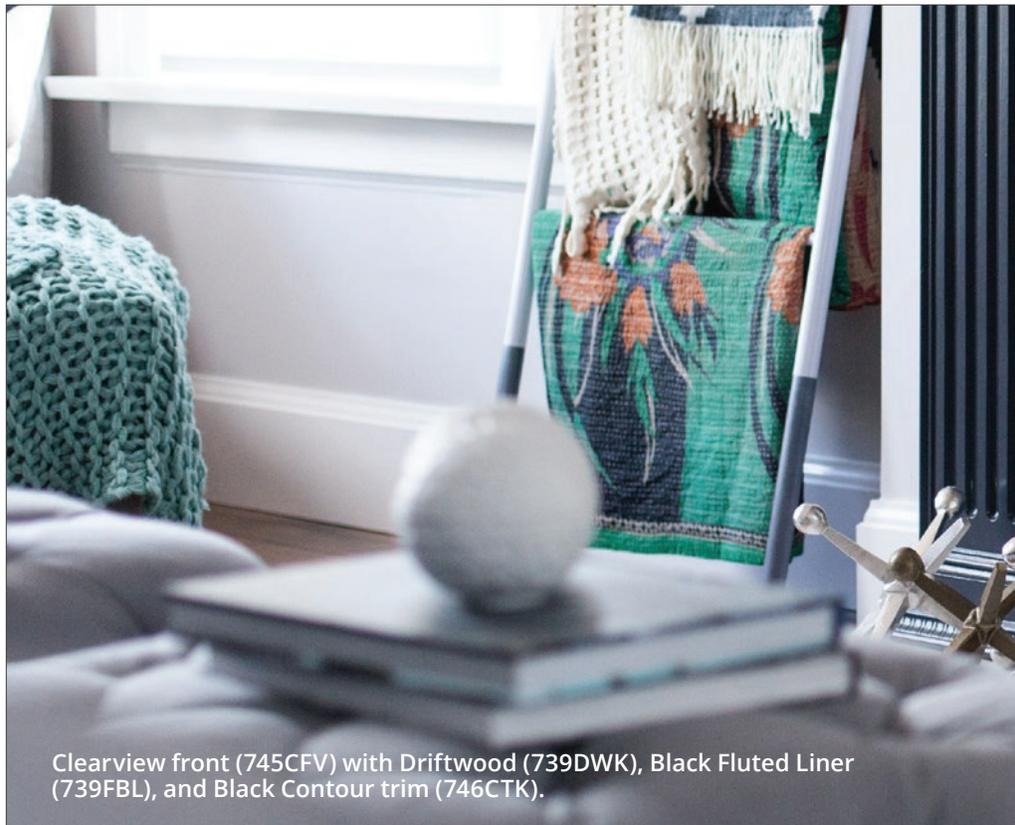

Clearview front (745CFV) with Driftwood (739DWK), Black Fluted Liner (739FBL), and Black Contour trim (746CTK).



Vintage Iron Contemporary Front	741SVI
Vintage Iron Contour Trim	746VIK



FenderFire Single Door Front	744FVI
Vintage Iron Cast Surround	715CVI

TRIMS

For a full selection of styles, visit

valorfireplaces.com/g3

or build your own custom design with Valor's new Design Center,

design.valorfireplaces.com



Nickel Contemporary Front	765CSPN
Black Picture Frame	764PFB



Clearview Front	745CFV
Clearview Access Panel	740CAP
Vintage Iron Square Trim	756STV



Black Matte Front	772MBF2
Black Square Trim	756STB



Black Contemporary Front	741SFB
Black Contour Trim	748CTK



Traditional Cast Front	742CFB
Black Deluxe Trim	747DTK



FenderFire Double Door	743FVI
Oversized Trim	753OTK

G3 COMPONENTS

ENGINE	Direct Vent	NG	739MN
		LPG	739MP
	B-Vent	NG	738KN
		LPG	738KP

FUEL BEDS	Driftwood	739DWK
	Traditional Logs	739LSK
	Rocks	739RSK

LINERS	Fluted Black	739FBL
	Red Brick	739VRL
	Reflective Glass	739RGL

FRONTS	Clearview	Black/Vintage Iron	745CFV	▶	Select a fret for Clearview front:		
	Contemporary	Black	741SFB		Clearview Access Panel	Black	740CAP
		Vintage Iron	741SVI		Clearview Cast fret	Black/Vintage Iron	758CCB
	Traditional Cast Iron	Black	742CFB		Ventana Fret	Black	1225VFB
	FenderFire Double Door	Black/Vintage Iron	743FVI				
	FenderFire Single Door		744FVI				
direct vent only	Contemporary	Black	765CSB				
		Copper	765CSC				
		Brushed Nickel	765CSN				
		Painted Nickel	765CSPN				
	Matte Black	Matte Black	772MBF2				

SURROUNDS

3-sided	Contour	Black	746CTK	26¾" h x 36½" w
		Vintage Iron	746VIK	
	Deluxe	Black	747DTK	31" h x 45-3/16" w
		Oversized	Black	
		Vintage Iron	753OTV	
	Square (2")	Black	767STB	25⅝" h x 34⅜" w
Square	Black	756STB	27⅞" h x 37½" w	
	Vintage Iron	756STV		
	Brushed Nickel	756STP		
Cast Plate	Vintage Iron	715CVI	29" h X 41" w	
4-sided	Contour	Vintage Iron	748CTK	30¼" h x 36½" w
		Black	749DTK	
	Deluxe	Vintage Iron	749VIK	31⅞" h x 37½" w
		Black	757STB	
Square	Vintage Iron	757STV		
	Picture Frame Square	Black	764PFB	27⅞" h x 39½" w For contemporary fronts (765).

BACKING/ CLOSURE PLATES	Closure Plate, oversized	Black	750OCP	29½" h x 42" w max. coverage. Use with Contour and Deluxe trims.
		Vintage Iron	750OVI	
	Backing Plate	Black	763BPB	30½" h X 42" w. Use with direct vent only.

OPTIONAL	Temperature Reduction Baffle	762TRB	
	Riser, Black	751LTK and 752BTK	
	Riser, Vintage Iron	751LVK and 752BVK	
	Decorative Rock	761DRK	Use with rock fuel bed
	Zero Clearance Kit	770ZCK	b-vent only
	Valor Wall Switch	1265WSK	Use with ValorStat handset, 739 model only.

MODEL/ FUEL BTU/hr	Model	Fuel	Fan Option	Remote	Max. Input BTU/hr	Min. Input	EnerGuide	Max. Output w/o fan*
	738KN	NG	No	ValorStat	24,000	6,500	61%	16,169
	738KP	LPG	No	ValorStat	24,000	13,000	61%	16,169
	739MN	NG	Yes	ValorStat Plus	24,000	6,500	70.3%	18,132
	739MP	LPG	Yes	ValorStat Plus	24,000	13,000	70.3%	18,132

Certified to ANSI Z21.88-2014/ CSA 2.33-2014 Vented Gas Fireplace Heater American National Standard
CGA — 2.17-91 Gas Fired Appliances for use at High Altitudes

* EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-15 test method



The ValorStat Plus Remote

- Select, adjust and program your desired temperature.
- Program the built-in timer to turn your fireplace ON before you wake up and DOWN when you go to bed.
- Turn your pilot light ON and OFF with your programmable remote control. You'll never need to get on your hands and knees to light the pilot again!



Optional Wall Switch (1265WSK)



Matte Black front with Rocks and optional Decorative Rock, Black Fluted liner, and Black Square surround.




Please Note: Printed images may vary from actual product. Refer to the 738/739 Legend G3 Insert Series engine manual for product installation. All product information is accurate at time of printing and is subject to change. For more information visit valorfireplaces.com




Vintage Iron FenderFire Double Door front with Traditional logs, Black Fluted liner, and Deluxe trim.

G3 SPECIFICATIONS

B-VENT 738

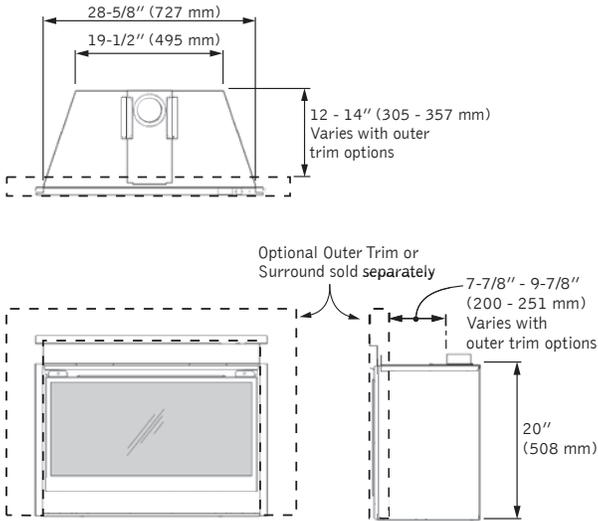


DIRECT VENT 739

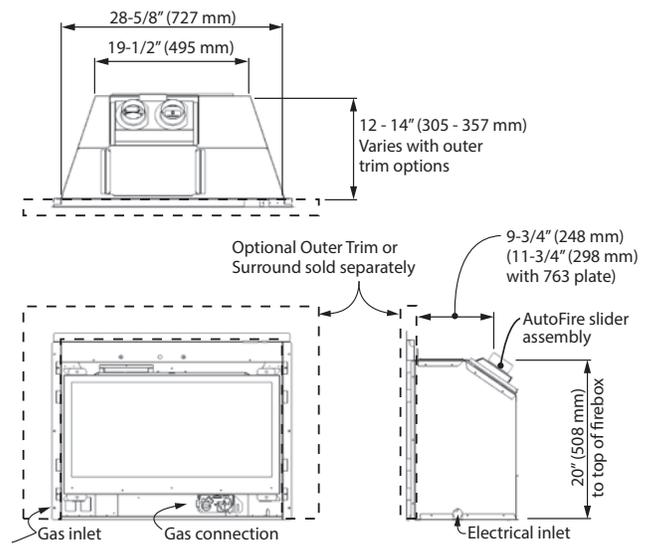


ALWAYS REFER TO THE MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

MINIMUM CAVITY DIMENSIONS

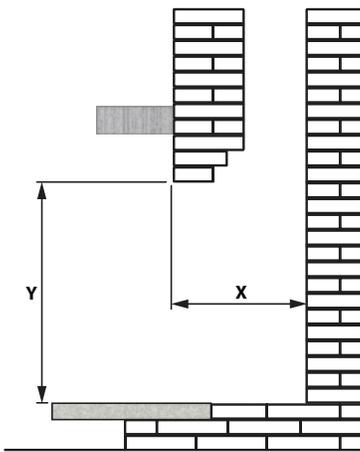


Minimum depth (X) = 12-14" (305-357 mm)—varies with outer trim options.
Minimum height (Y) = 20" (508 mm); 24" (610 mm) when using 763BPB Backing Plate.
Minimum width of fireplace opening at front is 28" (711 mm).
Note: check that masonry step does not interfere with install dimensions or vent pipe.

VENTING AND MANTEL CLEARANCES





Colinear Side Wall Kit (720SWK) available for Direct Vent Engine (not shown).

B-Vent (738)



Direct Vent (739)

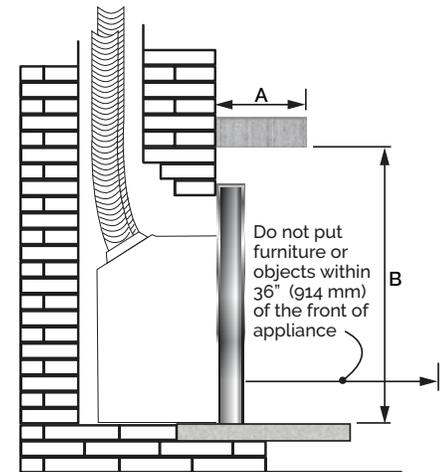

A	1" (25 mm)	1-6" (25-152 mm)	9" (229 mm)	12" (305 mm)
B*	36" (914 mm)	39" (991 mm)	42" (1067 mm)	45" (1143 mm)

*Measure taken from the underside of the mantel to finished hearth or surface that the unit is sitting on.

Sidewall Clearances: minimum distance from side of appliance (liner box) to combustible wall—9" (229 mm)



FenderFire Single Door front with Traditional Logs, Black Fluted liner, and Cast Iron trim in Vintage Iron.

Why choose a Valor®?

RADIANT HEAT

Like heat from the sun, **Valor®** fireplaces distribute radiant warmth directly to your living space. Radiant heat satisfies human comfort needs, using up to 25% less energy compared to traditional forced air systems. Valor warmth efficiently replaces the chill from cold windows and doors with steady, even heat to people and objects in the room.



PACIFIC NORTHWEST DESIGN, DEVELOPMENT & DISTRIBUTION

Locally owned and operated in the Pacific Northwest, every **Valor®** fireplace is designed, developed and manufactured exclusively for North America. With a proven product family history, Valor continues to introduce unique fireplaces that stand the test of time.

EASY CONTROL

Standard with every fireplace, our **ValorStat** remote gives you full control of your experience. Adjust the flame and heat to meet your desired comfort level as the room warms or as the outside temperature falls—truly a fireplace for all seasons.



THE COMFORT ZONE

Reduce your furnace's output of hot air into empty rooms and unused spaces.

Zone heating requires no ducting or forced air, and delivers radiant and convective warmth to the spaces you frequent the most. Where you want it—when you want it.



BURN CLEAN, ENGINEERED GREEN

Valor® specializes in the design of clean heat solutions for your home.

Our fireplaces use natural gas, the cleanest fireplace fuel you can burn, with the lowest particulate levels and lowest levels of greenhouse gases on the market.



PRODUCT VERSATILITY

Valor® products are extremely diverse in their application and design. Whether new construction or home renovation, we offer a wide range of options to help you select the right fireplace for your personal heating needs.



SAVINGS

Valor® designs innovative fireplaces that include many cost-saving features: for example, pilot flame that automatically turns off if your fireplace is inactive for over five days, saving energy and lowering overall home heating costs.

Keep forgetting to turn down your fireplace? The **ValorStat** automatically turns down after six hours.



NO POWER, NO PROBLEM.™

If the power fails in the winter, your home can get cold fast.

Valor® fireplaces are fully functional heaters that don't require electricity. Our fireplaces provide the perfect mixture of radiant and convective heat, eliminating the need for a fan. No power, no problem.



NO FAN NECESSARY

We firmly believe that you shouldn't have to put up with the constant buzz of a fan to be warm. That's why we designed glowing fires to radiate heat and secondary heat exchangers to naturally circulate warm air by convection throughout the room. While a fan is an option, you'll likely find it unnecessary.



RELIABILITY

With over 100 years in the heating industry, we take pride in providing high-quality, safe products.

Every **Valor®** product undergoes extensive safety testing so it's no surprise that many customers own more than one Valor fireplace in their lifetime.



FIREPLACE SAFETY — USE RADIANT HEAT SAFELY

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house. Included with your purchase, a **Valor®** barrier screen is recommended at all times. Install an approved after-market safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace.

For more information please visit valorfireplaces.com/safety.



⚠ WARNING

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov.



Proudly made in North America

Designed and manufactured by Miles Industries Ltd. 2019
Copyright Miles Industries Ltd. 2019

Note: Natural gas, in its original state, contains Benzene.



Contemporary Brushed Nickel front, Rocks with Black Fluted liner, and Black Picture frame.